

**ONECABLE(Power of Coaxial)
RECEIVER / MAX 500m/ FULL HD1080P-
30FPS/
AHD TVI/ 1CH, 4CH, 8CH
2M PIXELS PoC RECEIVER**

**HS-POCR01U
HS-POCR04U
HS-POCR08U**




SPECIFICATIONS

HS-POCR01U

Input Channel	1 CH (BNC)
Input Signal	AHD,TVI
Output Signal	AHD,TVI
Signal Format	1280x720p@25-30fps, 1920x1080p@25-30fps, 2160x1440p@25-30fps
Input Power Supply	Over DC30V / 1.0A
Output Power Supply	COAX DC30V
Transmission Distance	Max. 500m(5C-2V), Max. 300m(3C-2V)
Terminal	Power Input : DC Jack/ Video input : BNC_F(Power supply superimposed terminal) / Video output : BNC_F
UTP DIP SW	2p Terminal Block (UTC Setting Switch)
Green LED	On : Receiving Video / Off : Video loss / Flashing : Over current
Yellow LED	On : When adapter power is turned on / Off : When adapter power is not turned on
Power Consumption	Max. 13W
Operating Temperature	-10°C ~ +50°C
Operating Humidity	0 ~ 80%
Dimension	104(W) x 60(H) x 25(D) mm
Weight	Approx. 136g (Aluminum)

DIMENSION

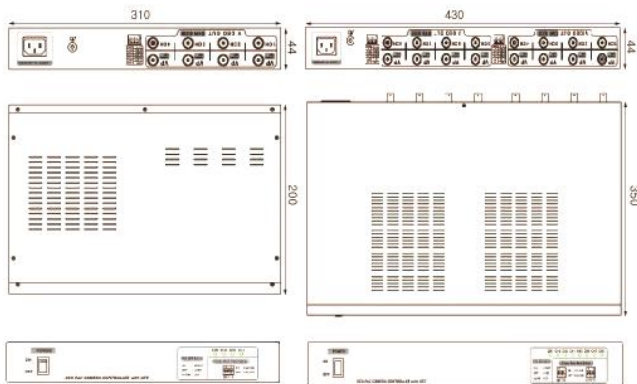

SPECIFICATIONS

HS-POCR04U

Input Channel	4 CH (BNC)
Input Signal	AHD,TVI
Output Signal	AHD,TVI
Signal Format	1280x720p@25-30fps, 1920x1080p@25-30fps, 2160x1440p@25-30fps
Input Power Supply	AC 100 ~ 240V 50/60Hz
Output Power Supply	COAX DC30V
Transmission Distance	Max. 500m(5C-2V), Max. 300m(3C-2V)
Terminal	Power Input : AC Inlet / Video input : BNC_F(Power supply superimposed terminal) / Video output : BNC_F
UTP DIP SW	5p Terminal Block
Green LED	On : Receiving Video / Off : Video loss / Flashing : Over current
Power Consumption	Max. 45W
Operating Temperature	-10°C ~ +50°C
Operating Humidity	0 ~ 80%
Dimension	309(W) x 44(H) x 213(D) mm
Weight	Approx. 1.8kg (Steel)

SPECIFICATIONS

HS-POCR08U

Input Channel	8 CH (BNC)
Input Signal	AHD,TVI
Output Signal	AHD,TVI
Signal Format	1280x720p@25-30fps, 1920x1080p@25-30fps, 2160x1440p@25-30fps
Input Power Supply	AC 100 ~ 240V 50/60Hz
Output Power Supply	COAX DC30V
Transmission Distance	Max. 500m(5C-2V), Max. 300m(3C-2V)
Terminal	Power Input : AC Inlet / Video input : BNC_F(Power supply superimposed terminal) / Video output : BNC_F
UTP DIP SW	5p Terminal Block
Green LED	On : Receiving Video / Off : Video loss / Flashing : Over current
Power Consumption	Max. 80W
Operating Temperature	-10°C ~ +50°C
Operating Humidity	0 ~ 80%
Dimension	430(W) x 44(H) x 350(D) mm
Weight	Approx. 3.8kg (Steel)