


NETWORK IP CAMERA

HIP-HP5H2V5

5MP NETWORK IP IR BULLET CAMERA

STARVIS **H.265** **WDR**

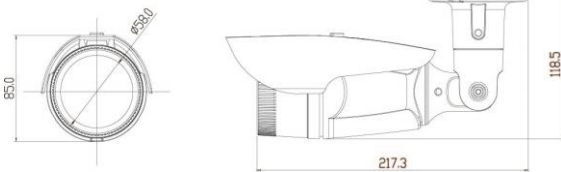

Features

- Sony STARVIS 5.69MP Image Sensor
- Ultra low light color camera(0.01lux/F1.2)
- Triple codec(H.265, H.264, MJPEG)
- Triple Stream
- Max 30fps @ all resolution
- Support Onvif/PoE/External Video
- DOL True WDR
- IR LED : High Power LED 4units(50m)
- True Day & Night
- Motorized VF Lens 2.8~12mm
- IP66 Weatherproof

Camera Specifications

| | | |
|---------------|--------------------|---|
| IMAGE | Image Sensor | Sony Starvis 5.69MP(1/2.8") Image Sensor |
| | Scan System | Progressive Scan |
| | Total Pixels | 2704(H) x 2104(V), 5.68 Mega Pixels |
| | Effective Pixels | 2616(H) x 1964(V), 58.13 Mega Pixels |
| Function | Day & Night | Auto / Day(Color) / Night(BW) |
| | Privacy Area | On / Off (8 Programmable Zones) |
| | Motion Detection | 432 Zone (On / Off, 1~5step) |
| | W D R | DOL True WDR |
| | 3D DNR | 2DNR, 3DNR |
| | S/N Ratio | More 52dB |
| | BLC | HLC, BLC |
| | Digital Zoom | 16x |
| | Degof/LDS/Mirror | On / Off |
| | White Balance | Auto/Push/Indoor/Outdoor/Fluorescent/User |
| Lens | Focal Length | Motorized VF Lens 2.8~12mm |
| IR LEDs | IR LEDs | High Power LED 4 units |
| Electrical | Power Supply | DC12[V] ±10% / Max 750mA |
| | Operating Temp. | -10°C ~ +50°C |
| Environmental | Preservation Temp. | -20°C ~ +60°C |
| | Humidity | 0% ~ 80% |
| Mechanical | Weight. | Approx. 750g(W/Sunshield & Bracket) |

Network Specifications

| | | |
|-------------|---------------------|--|
| System | OS | Embedded Linux |
| Network | Interface | RJ45 10/100 Base-T |
| | Protocol | TCP/IP,UDP/IP,RTP,RTSP,RTCP,NTP, HTTP,DHCP,FTP,SMTP,DNS,DDNS |
| | Onvif | ver17.06 |
| | DDNS | Ipinker.net |
| Video | Simultaneous Access | Max. 10 user |
| | Compress Format | H.265, H.264, MJPEG |
| | Resolution | 2560x1920/2560x1440/2048x1536/1600x1200 /1920x1080/1280x1024/1280x960/640x480/ 640x360/320x240/320x180 |
| | Frame Rate | Max. 30fps @all resolution |
| | Streaming | Triple Stream (Stream1,2,3) RTP/RTSP, UnicastRTP, Multicast RTP |
| Audio | Compress Format | G.711 u-law |
| | Streaming | Two way |
| Event | Sensor In | 1(NC/NO) |
| | Alarm Out | 1 (Digital Output, Open Collector) |
| Web Browser | OS | Windows 7, 8, 10 |
| | Manager | IE(over 11), Firefox, Safari, Opera |
| | Viewer | IE only (Active-X) |

*Specification and Design are subject to change without notice